

MV-ACU3-MBMs-AM-FL

USB 3.0 FLEXIBLE DATA CABLE

The USB 3.0 Flexible Data Cable can be used for data transmission and power supply of USB 3.0 interface cameras.

Available Product

Hikrobot USB 3.0 Interface Area Scan Camera




Order Models


- 3 m USB 3.0 Flexible Data Cable : MV-ACU3-MBMs-AM-FL-3m
- 1 m USB 3.0 High-Shielding Flexible Data Cable : MV-ACU3-MBMs-AM-FL (EMC)-1m
- 3 m USB 3.0 High-Shielding Flexible Data Cable : MV-ACU3-MBMs-AM-FL (EMC)-3m

Dimension


MV-ACU3-MBMs-AM-FL-3m

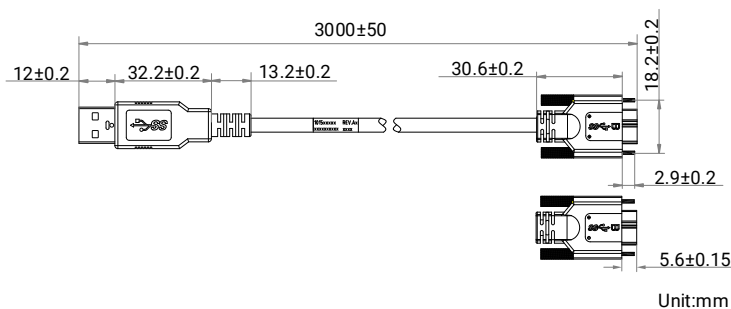

MV-ACU3-MBMs-AM-FL (EMC)-1m

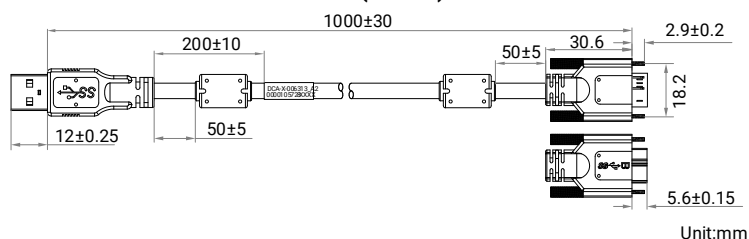

MV-ACU3-MBMs-AM-FL (EMC)-3m

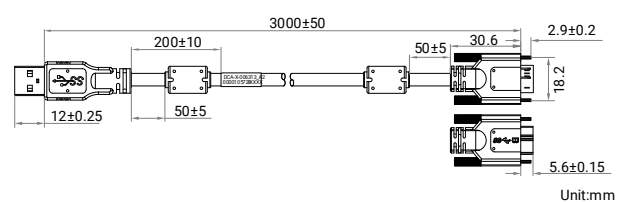

Specification

Specifications	Model	MV-ACU3-MBMs-AM-FL-3m	MV-ACU3-MBMs-AMFL (EMC)-1m	MV-ACU3-MBMs-AMFL (EMC)-3m
		USB 3.0 Flexible Data Cable	USB 3.0 High-Shielding Flexible Data Cable	
Physical specification				
End A connector	Micro-B male (with screw)			
End B connector	A male			
Cable diameter	6.8 mm			
Length	3 m	1 m	3 m	
Cable mechanical	26#*1P+24#*2C+26#* (1P+D) +AL+D+B	26#*1P+24#*2C+26#* (1P+D) +AL+D+B (with magnetic ring)		
Jacket	Nitrile PVC			
Cable color	Black			
Connector durability	> 750 cycles			
Min. bending radius	81.6 mm			
Applicable scenario	Drag chains			
Max. U-type bending cycles	100 thousand times			
Electrical specification				
Max. voltage	5 VDC			
Additional information				
Working temperature	−20 °C to 80 °C (−4 °F to 176 °F)			
Certification	RoHS, UL			
Packaging	Individual package			

Note: Read the camera user manual before connecting the cable to the camera.