

MV-RS-Base-L

Galvanometer Laser 3D Camera



RoHS **CE**

Introduction

MV-RS-Base-L galvanometer laser 3D camera adopts laser and high-precision galvanometer technology, combined with high-resolution color imaging system and built-in 3D image processing algorithm with high robustness to obtain the RGB-D image with sub-millimeter measurement accuracy.


Available Model

MV-RS-Base-L

Applicable Industry

Workpiece loading and unloading, random bin picking, assembly guidance.

Dimension

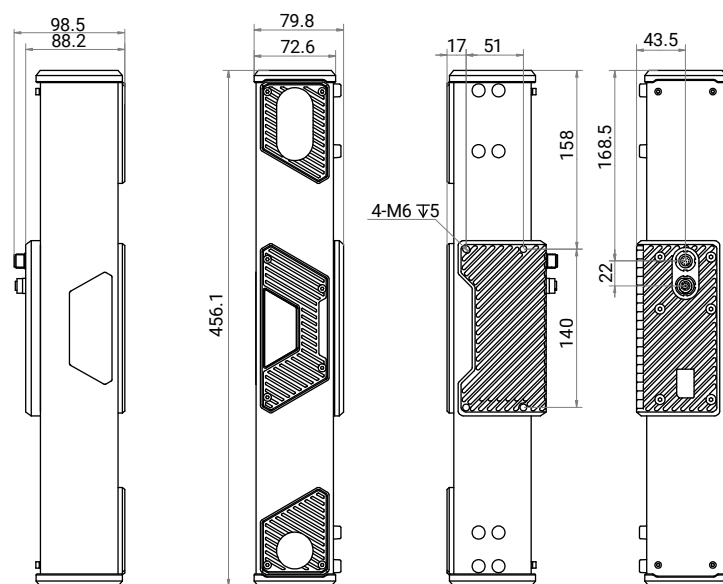


Unit: mm

Key Features

- Customized optical system provides high-quality image.
- Supports high-uniformity laser module to provide a more detailed point cloud.
- Supports multi-core parallel processing with high precision and high image acquisition rate.
- Supports alignment between depth images and RGB images, convenient for secondary development.
- Adopts high-strength carbon fiber design with high stability.

Measurement Range Diagram

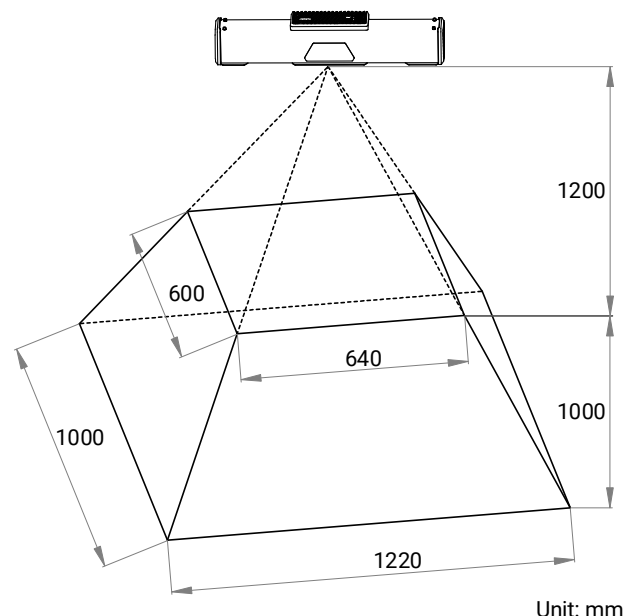


Unit: mm

Model	MV-RS-Base-L
Performance	
Near field of view	640 mm × 600 mm @ 1200 mm
Typical field of view	1100 mm × 900 mm @ 1800 mm
Far field of view	1220 mm × 1000 mm @ 2200 mm
Clearance distance (CD)	1200 mm
Measurement range (MR)	1000 mm
Repeatability (Z-axis)*1	0.08 mm @ 1800 mm
VDI/VDE accuracy*2	0.15 mm @ 1800 mm
Resolution	RGB: 3200 × 1944 Depth: 1632 × 1264
Data acquisition time	0.4 s to 0.9 s
Image output delay	0.8 s to 1.5 s
Data type	Original image (mono and color images), depth image, RGB-D image
Electrical feature	
Data interface	Gigabit Ethernet (1000 Mbit/s)
Digital I/O	12-pin M12 interface provides power and I/O, including opto-isolated input × 3 (Line 0/3/6), opto-isolated output × 3 (Line 1/4/7)
Power supply	24 VDC
Power consumption	Typ. 15 W @ 24 VDC
Mechanical	
Dimension	456.1 mm × 79.8 mm × 98.5 mm (18.0" × 3.1" × 3.9")
Weight	Approx. 1.5 kg (3.3 lb.)
Ingress protection	IP65
Temperature	Working temperature: 0 °C to 45 °C (32 °F to 113 °F) Storage temperature: -30 °C to 80 °C (-22 °F to 176 °F)
Humidity	20% RH to 85% RH (no condensation)
Laser	
Laser safety class	Class 2
Wavelength	638 nm
General	
Client software	RobotPilot, HiViewer
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11
Certification	RoHS, CE

*1: This value is the standard deviation of 100 depth value measurements. The measurement target is a ceramic plate.

*2: The measurement targets are double ceramic balls with a diameter of 30 mm and a ball spacing of 100 mm.

Installation Axonometric Drawing

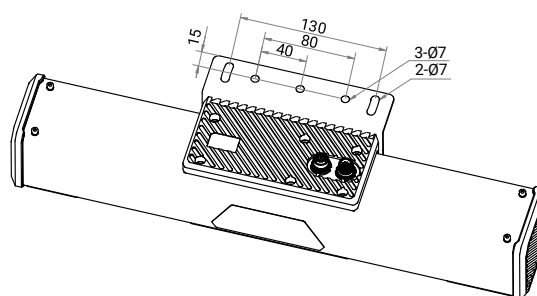

Hangzhou Hikrobot Co. Ltd.
en.hikrobotics.com

Unit: mm

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.