

MV-SC3013XC

1.3 MP Color Vision Sensor

With built-in high-precision vision algorithms, MV-SC3013XC vision sensor can realize counting, existence, measurement, recognition and other functions. It can be easily configured and operated via the SCMVS client software, and it uses RS-232 and Ethernet to output vision tool results and customized results.



Key Features

- Adopts embedded hardware platform to realize high-speed image processing.
- Built-in high-precision positioning, measurement and recognition algorithms for counting, defects, existence, positioning and other functions.
- Supports RS-232, TCP, UDP, FTP, Modbus, PROFINET, EtherNet/IP and other communication modes.
- Adopts multiple IO interfaces for input and output signals.
- Supports viewing the device's status in real time via 360° visual indicator, convenient for debugging and maintenance.
- Rotatable cable tail design, suitable for narrow space.
- Adopts polarized, diffuser, and full-transparent multiple optical lighting with good environmental adaptability.
- IP67 protection without fear of harsh industrial application environments.

Typical Application

- Consumer electronics
- Food and pharmaceutical
- Automobile



Specification

Model	MV-SC3013XC-08M-WBN	MV-SC3013XC-12M-WBN	MV-SC3013XC-16M-WBN
Tool			
Vision tool	● Measurement: P2P measurement, P2L measurement, contrast measurement, grayscale size, edge width measurement, width measurement, brightness average value, L2L angle, color measurement, color size, diameter measurement, line angle ● Existence: Spot existence, edge existence, contour existence, pattern existence, circle existence, line existence, anomaly judge, existence detection ● Count: Spot count, edge count, contour count, pattern count, learning-based count, color count ● Recognition: Multi-object count, code recognition, color contrast, color recognition, category recognition, classification registration, object registration, OCR, learning-based OCR, character horizontal stripe detection ● Logic: Calculator, if module, logic judge, format output, condition judge, character comparison, combination judge ● Location: Calibration convert, single point alignment, point rectify, point grasp, scale transformation, fixture ● Deep learning: DL classification, DL object detection ● Defect detection: Anomaly detection ● Industry tools: OCR and defect detection		
Solution capacity	Supports importing and exporting project, up to 32 projects can be stored.		
Communication protocol	RS-232, TCP, UDP, FTP, PROFINET, Modbus, EtherNet/IP, MELSEC/SLMP, FINS, Keyence KV		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	6.9 μm × 6.9 μm		
Sensor size	1/1.45"		
Resolution	1216 × 1024		
Max. frame rate	60 fps		
Gain	0 dB to 15 dB		
Exposure time	6 μs to 1 sec		
Pixel format	RGB 8, Mono 8		
Mono/color	Color		
Electrical feature			
Data interface	Fast Ethernet (100 Mbit/s)		
Digital I/O	12-pin M12 connector provides power and I/O, including opto-isolated input (LINE 0/1/2) × 3, opto-isolated output (LINE 3/4/5) × 3, and RS-232 × 1 Supports triggering device via pressing top trigger button		
Power supply	24 VDC		
Power consumption	Avg. 7 W @ 24 VDC (light source enabled) Max. 22 W @ 24 VDC (light source enabled)		
Mechanical			

Lens mount	M12-mount, mechanical autofocus supported		
Focal length	8 mm	12 mm	16 mm
Lens cap	Polarized + diffuser + full-transparent lens cap		
Light source	White spot light source. Red/blue/IR point light source is optional		
Aiming system	1 LED		
Indicator	360° visual indicator		
Dimension	Straight angle: 80.1 mm × 43 mm × 44.3 mm (3.2" × 1.7" × 1.7") Right angle: 58.5 mm × 43 mm × 65.4 mm (2.3" × 1.7" × 2.6")		
Weight	Approx. 190 g (0.4 lb.)		
Ingress protection	IP67 (under proper installation of waterproof lens cap)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% RH to 95% RH (no condensation)		
Vibration resistance	Meets standard IEC 60068-2-6:2007. Device only (without installation bracket): 10 Hz to 55 Hz, 1.5 mm peak-to-peak amplitude, 2 hours per axis (X, Y, Z)		
Shock resistance	Meets standard IEC 60068-2-27:2008. Device only (without installation bracket): 30 g / 11 ms, half-sine wave, 500 shocks per axis (6 directions)		
General			
Client software	SCMVS		
Certification	CE, KC		

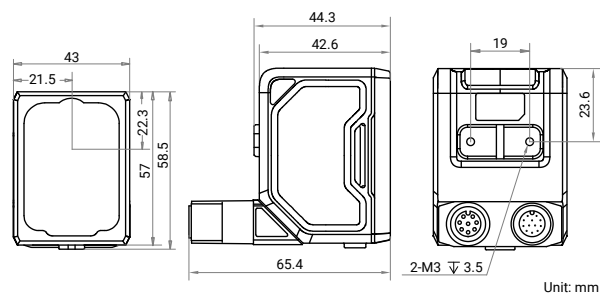
Available Models

- 8 mm focal length: MV-SC3013XC-08M-WBN
- 12 mm focal length: MV-SC3013XC-16M-WBN
- 16 mm focal length: MV-SC3013XC-12M-WBN

Detection Range

MV-SC3013XC (Unit: mm)					
Lens Focal Length	Working Distance	Field of View		Single Pixel Accuracy	Diagram of Field of View
		H	V		
8	30	31	26	0.03	
	100	103	87	0.08	
	200	206	173	0.17	
	300	308	260	0.25	
	600	617	520	0.51	
	1000	1028	866	0.85	
	2000	2056	1732	1.69	
12	60	42	35	0.03	
	100	70	59	0.06	
	200	140	118	0.12	
	300	210	177	0.17	
	600	420	353	0.35	
	1000	699	589	0.58	
	2000	1398	1178	1.15	
16	110	58	49	0.05	
	200	105	88	0.09	
	300	157	132	0.13	
	600	315	265	0.26	
	1000	524	442	0.43	
	2000	1049	883	0.86	

Device (Right Angle):

[illegible]

Technical drawing of the 1000 Series 1000W Electric Kettle, showing front, top, and side views with dimensions in mm.

Front View Dimensions:

- Top width: 21.5
- Bottom width: 43 (inner) / 49 (outer)
- Height: 57 (inner) / 58.5 (outer)

Top View Dimensions:

- Overall width: 146.3
- Left side width: 40
- Right side width: 45
- Distance between side panels: 42.6
- Distance between front panel and side panel: 65.4
- Radius of front panel: R24
- Angle of front panel: 35°

Side View Dimensions:

- Height: 23
- Distance between front panel and side panel: 19
- Distance between side panel and back panel: 23.6
- Distance between back panel and rear panel: 25
- Overall depth: 50

Unit: mm

[illegible]